

CC COMPACT DIP SWITCH



EASYLINE DIP SWITCH C-R1

187116, 187117, 187119, 187279

Typical Applications

Built-in in compact luminaires for

- Shop lighting
- Office lighting
- Residential lighting
- Downlights

EasyLine DIP switch C-R1

- **SELECTABLE OUTPUT CURRENT VIA DIP SWITCH**
- **VERY LOW RIPPLE CURRENT: < 1%**
- **SELV**
- **LONG SERVICE LIFE: UP TO 100.000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



EasyLine DIP switch C-R1

Product features

- Compact casing shape

Functions

- Selectable current output by dip-switch

Electrical features

- Mains voltage: 220–240 V ±10%
- Mains frequency: 50–60 Hz
- Push-in terminals:
rigid 0.5–1.5 mm²
strand 0.75–1.5 mm²
- Power factor at full load: > 0.95
- Open circuit voltage (U_{max.}): 60 V
- Secondary side switching of LED modules is not allowed.

Safety features


- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Degree of protection: IP20
- Protection class II
- SELV
- SVM: < 0.4
- PstLM: < 1

Packaging units

| Ref. No. | Packaging unit | | Weight g |
|----------|-------------------|---------------------|-------------|
| | Pieces per box | Boxes per pallet | |
| 187116 | 40 | 90 | 100 |
| 187117 | 40 | 90 | 100 |
| 187119 | 40 | 90 | 100 |
| 187279 | 40 | 90 | 115 |

Product guarantee

- 5 years
for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com).
We will be happy to send you these conditions upon request.

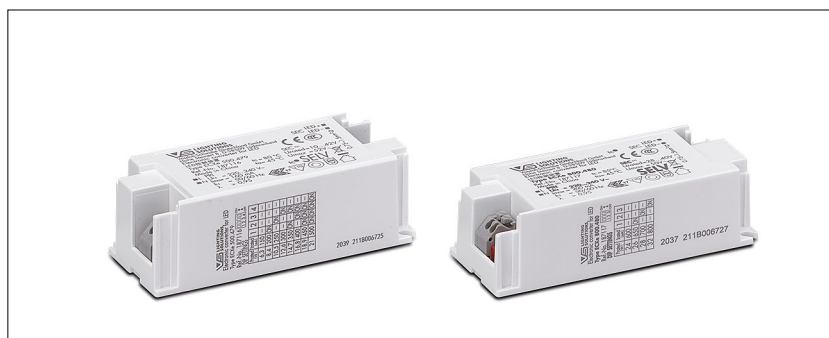


Dimensions

| Ref. No. | Casing | Length mm | Width mm | Height mm |
|------------------------------|--------|--------------|-------------|--------------|
| 187116 | K86 | 97 | 43 | 30 |
| 187117, 187119, 187279 | K87 | 97 | 43 | 26 |


Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2/EN 61000-3-3
- EN 62384
- EN 55015
- EN 61000-4-2/EN 61000-4-5

K86



K87



Cord grip for K86


Available for independent operation
Available separately
2 cord grips per LED driver required
Packaging unit: 2 pcs.

Ref. No.: 187203

Cord grip for K87

Available for independent operation
Available separately
2 cord grips per LED driver required
Packaging unit: 2 pcs.

Ref. No.: 187204



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Drivers – EasyLine DIP switch C-R1

Electrical characteristics

| Max. output W | Type | Ref. No. | Voltage 50–60 Hz V | Mains current mA | Inrush current A / μ s | Current output DC mA (\pm 5%) | Voltage output DC (V) | THD at full load % (230 V) | Efficiency at full load % (230 V) | Ripple 100 Hz % |
|---------------|---------------|---------------|--------------------|------------------|----------------------------|----------------------------------|-----------------------|----------------------------|-----------------------------------|-----------------|
| 21 | ECXe 500.479 | 187116 | 220–240 | 152–96 | 10 / 200 | 150–500 | 10–42 | < 5 | 89 | < 1 |
| 32 | ECXe 800.480 | 187117 | 220–240 | 260–198 | 30 / 200 | 600–800 | 28–40 | < 6 | 93 | < 1 |
| 40 | ECXe 800.600 | 187279 | 220–240 | 215–195 | 16 / 230 | 500–800 | 35–50 | < 16 | 89 | < 1 |
| 42 | ECXe 1050.482 | 187119 | 220–240 | 320–240 | 30 / 200 | 850–1050 | 28–40 | < 6 | 90 | < 1 |

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

| Ref. No. | Ambient temperature range | | Operation humidity range | | Storage temperature range | | Storage humidity range | | Max. operation temperature at t_c point °C | Degree of protection |
|----------------|---------------------------|---------|--------------------------|--------|---------------------------|---------|------------------------|--------|--|----------------------|
| | °C min. | °C max. | % min. | % max. | °C min. | °C max. | % min. | % max. | | |
| 187116 | -20 | +45 | 20 | 90 | -25 | +60 | 20 | 90 | +80 | IP20 |
| 187117, 187119 | | | | | -40 | +80 | | | +85 | |
| 187279 | | | | | -25 | +60 | | | +85 | |


Expected service life time

at operation temperatures at t_c point

| Operation current | Ref. No. 187116 | | | 187117, 186119 | | | 187279 | |
|-------------------|-----------------|--------|--------|----------------|--------|--------|---------|--------|
| | 65 °C* | 70 °C | 80 °C | 65 °C* | 75 °C | 85 °C | 75 °C* | 85 °C |
| hrs. | 100,000 | 88,000 | 44,000 | 100,000 | 60,000 | 30,000 | 100,000 | 50,000 |

* recommended operation temperature

Product labels

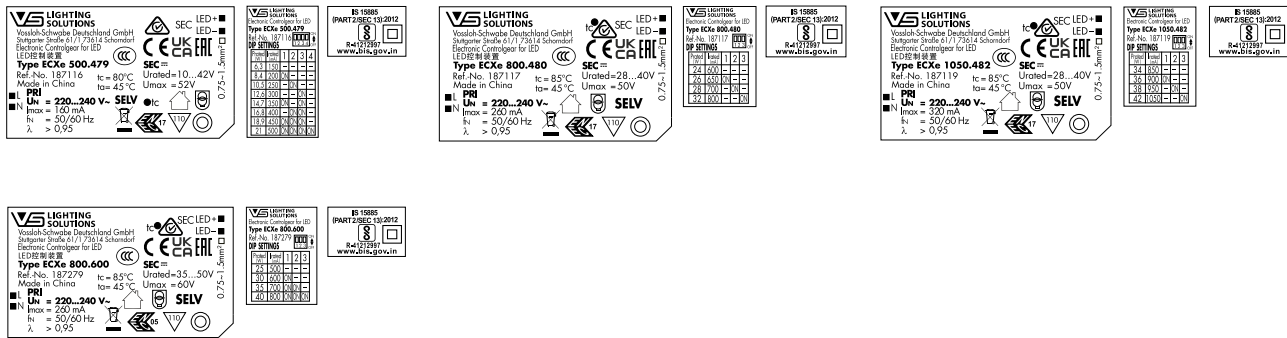

DIP switch settings

| 187116 / ECXe 500.479 | | | | | | |
|-----------------------|-----|-----|-----|-----|----------|------------|
| Pin | 1 | 2 | 3 | 4 | Output W | Current mA |
| Factory settings (mA) | 500 | | | | | |
| OFF | OFF | OFF | OFF | OFF | 6.3 | 150 |
| ON | OFF | OFF | OFF | OFF | 8.4 | 200 |
| OFF | ON | OFF | OFF | OFF | 10.5 | 250 |
| OFF | OFF | ON | OFF | OFF | 12.6 | 300 |
| ON | OFF | ON | OFF | OFF | 14.7 | 350 |
| OFF | OFF | ON | ON | OFF | 16.8 | 400 |
| ON | ON | ON | OFF | OFF | 18.9 | 450 |
| ON | ON | ON | ON | OFF | 21 | 500 |

| 187117 / ECXe 800.480 | | | | | |
|-----------------------|-----|-----|-----|----------|------------|
| Pin | 1 | 2 | 3 | Output W | Current mA |
| Factory settings (mA) | 800 | | | | |
| OFF | OFF | OFF | OFF | 24 | 600 |
| ON | OFF | OFF | OFF | 26 | 650 |
| OFF | ON | OFF | OFF | 28 | 700 |
| OFF | OFF | ON | OFF | 32 | 800 |

| 187279 / ECXe 800.600 | | | | | |
|-----------------------|-----|-----|-----|------------|----------|
| Pin | 1 | 2 | 3 | Leistung W | Strom mA |
| Werkseinstellung (mA) | 800 | | | | |
| OFF | OFF | OFF | OFF | 25 | 500 |
| ON | OFF | OFF | OFF | 30 | 600 |
| ON | ON | OFF | OFF | 35 | 700 |
| ON | ON | ON | OFF | 40 | 800 |


| 187119 / ECXe 1050.482 | | | | | |
|------------------------|------|-----|-----|----------|------------|
| Pin | 1 | 2 | 3 | Output W | Current mA |
| Factory settings (mA) | 1050 | | | | |
| OFF | OFF | OFF | OFF | 34 | 850 |
| ON | OFF | OFF | OFF | 36 | 900 |
| OFF | ON | OFF | OFF | 38 | 950 |
| OFF | OFF | ON | OFF | 42 | 1050 |

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.




Typ. performance graphs for 187116 / Type ECXe 500.479


Working area

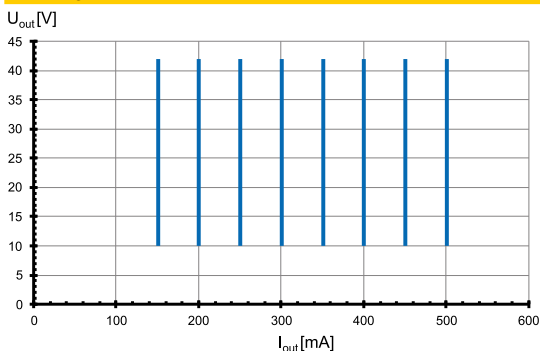


Efficiency

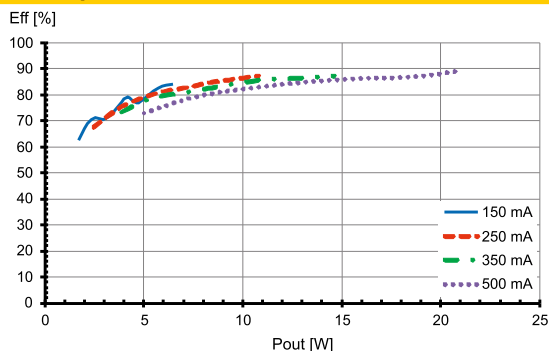

Power factor

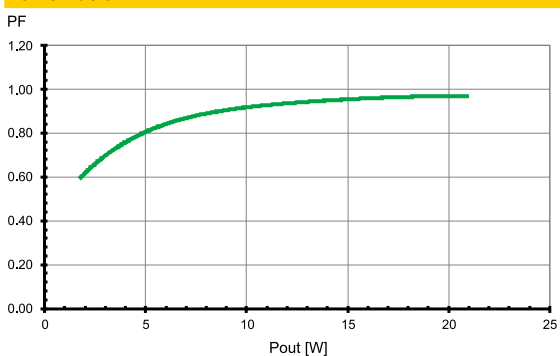


Total harmonic factor (THD)

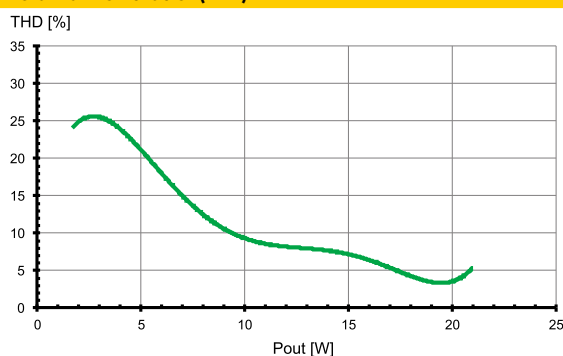


Typ. performance graphs for 187117 / Type ECXe 800.480


Working area

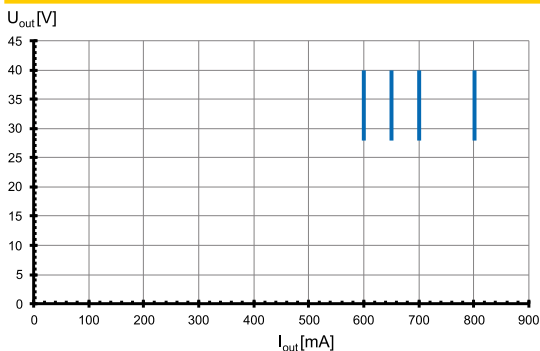


Efficiency

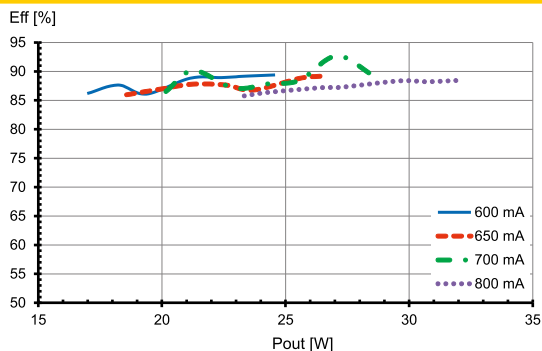

Power factor

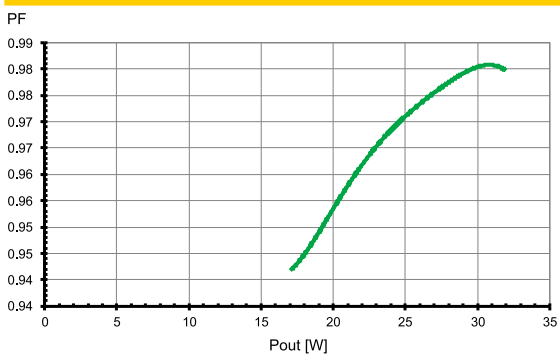


Total harmonic factor (THD)

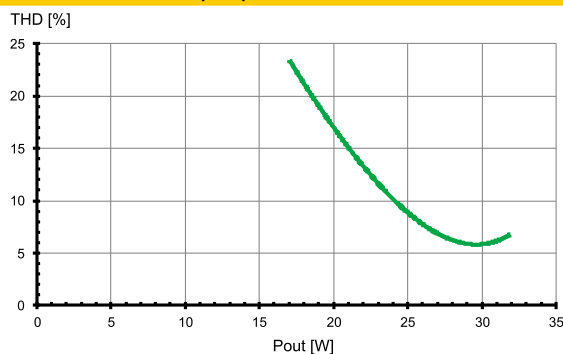


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 187119 / Type ECXe 1050.482


Working area

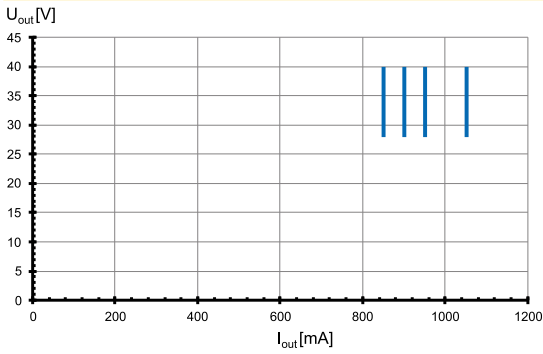


Efficiency

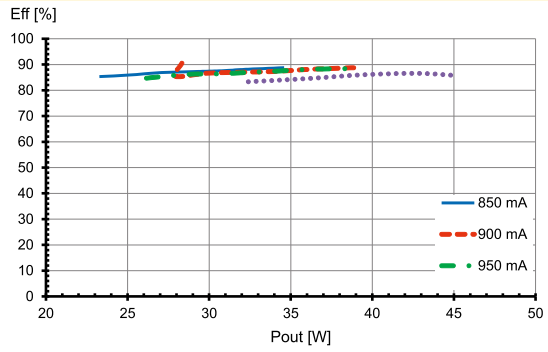

Power factor

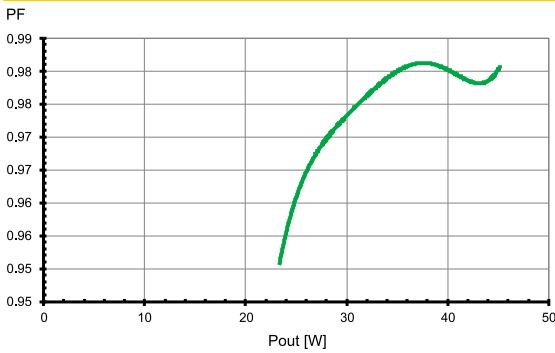


Total harmonic factor (THD)

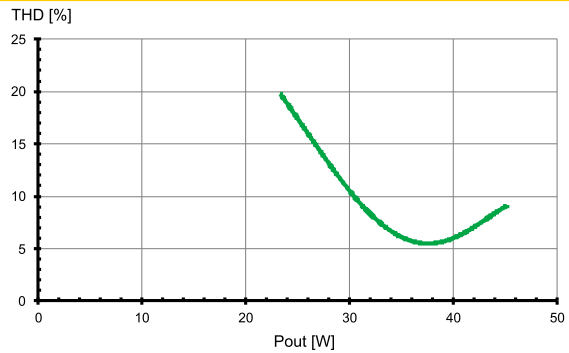


Typ. performance graphs for 187279 / Type ECXe 800.600


Working area

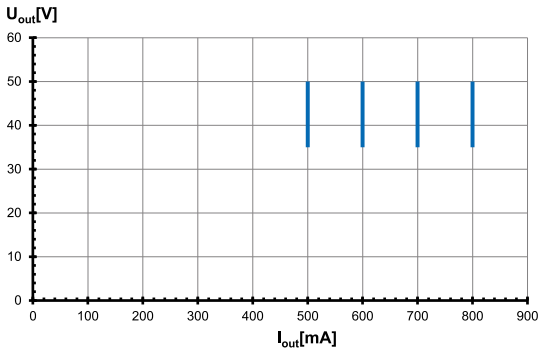


Efficiency

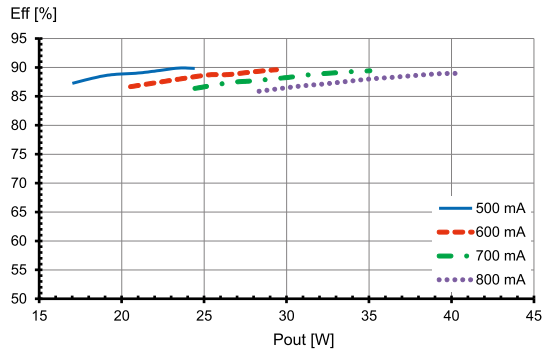

Power factor

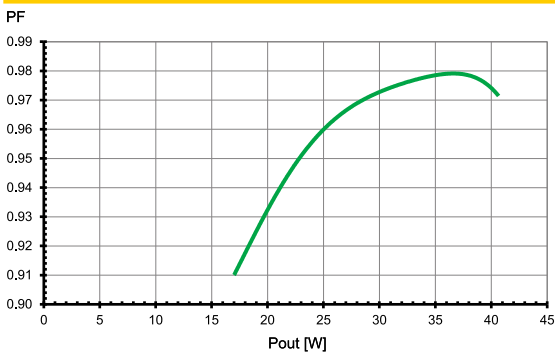

Total harmonic factor (THD)

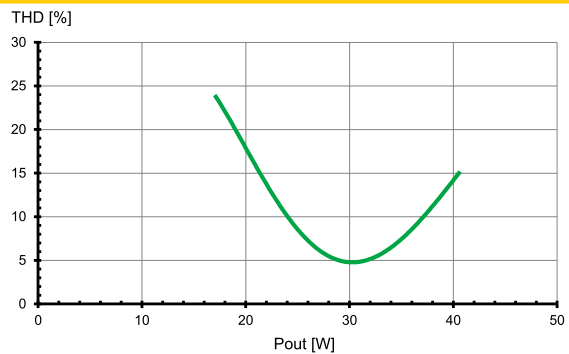

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Safety functions

- Transient mains peaks protection:
Values are in compliance with EN 61547 (interference immunity).
Surges between L–N: up to 1 kV
- Short-circuit protection: The control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree (< 60 V DC).
Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection. In case of overheating the output current of the control gear will be reduced. After the temperature will drop below the critical temperature value, the output current rises again to the previously set value.
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Built-in: Any position inside a luminaire is allowed
Independent application: Drivers are allowed to use for independent applications with separate cord grip (Ref. No.: 187203 for K86 or 187204 for K87).
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices.
Independent LED drivers do not need to be integrated into a casing.
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.
LED drivers should be mounted with the greatest possible clearance to heat sources.
During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of rigid 0.5–1.5 mm² strand 0.75–1.5 mm²
- Stripped length: 7–8 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
Max. secondary side lead length: 2 m

- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.
- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- Parallel wiring: Parallel connection of LED loads is not allowed.
- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641 part 11 for B characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m Ω (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

| Type | Ref. No. | Automatic cut-out type and possible no. of VS drivers pcs. | | | | | |
|------------------------|---------------|--|--------|--------|--------|--------|--------|
| Automatic cut-out type | | B 10 A | B 13 A | B 16 A | C 10 A | C 13 A | C 16 A |
| ECXe 500.479 | 187116 | 30 | 38 | 45 | 38 | 47 | 57 |
| ECXe 800.480 | 187117 | 22 | 27 | 32 | 27 | 34 | 41 |
| ECXe 800.600 | 187279 | 23 | 30 | 36 | 38 | 50 | 61 |
| ECXe 1050.482 | 187119 | 16 | 20 | 24 | 20 | 25 | 30 |

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.