

## PCC22012TD Series



### 12W Constant Current LED Lighting Power Supply



#### Key Features:


- Constant current mode power supply
- 220-240V AC input
- Captive terminal screws for ease of connection
- Snap lock cable strain relief for quick installation
- Short circuit, over load, over temperature protections
- Class II product
- Cooling by free air convection
- SELV Equivalent

#### PCC12 SPECIFICATION

Part Code	PCC22012TD
Voltage	220V ~ 240VAC
Frequency	50 ~ 60 Hz
Voltage	27 ~ 55V
Current	0.08A
Power	12W
Power factor	0.95
Efficiency	90%
Over Load	Auto recovery
Over Temperature	Thermal shutdown
Temperature	Operating: -20 ~ +50°C; Storage: -20~ +70°C
Safety Standard	Design refers to EN61347-1, EN61347-2-13
EMC	Compliance to EN55015, EN61547, EN61000-3-2, EN61000-3-3
M.T.B.F.	50K hrs min. MIL-HDBK-217F (25°C)
Packing	N.W.:0.06Kg
Connections (Input)	Screw Terminal on I/P & O/P
Connections (Output)	200mm H03VV-F 2G*075mm2 2C
Weight	60g
Dimensions	98 x 39 x 22mm



#### Mechanical Diagrams

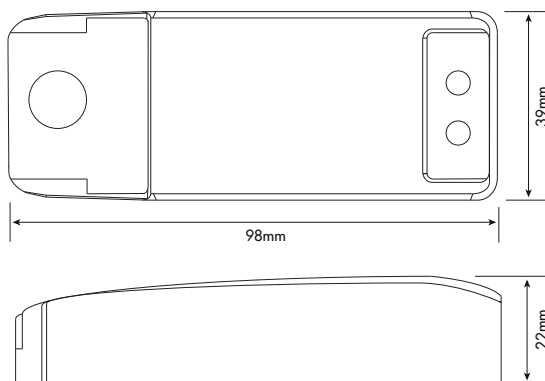

PowerLed (UK) Ltd  
Orion House  
Calleva Park  
Aldermaston  
Berkshire  
RG7 8SN

Contact:  
Tel: 0118 9703856  
enquiries@powerled.uk.com  
www.powerled.uk.com

